



Powering Innovation



PROTECTION + AUTOMATION + CONTROL

ELECTRONIC HOOTER

JAV 031

JVS ELECTRONICS PVT. LTD.

#121, Manchanayakanahalli,
Bangalore Mysore Highway, Bidadi,
Ramanagara District - 562 109, Karnataka, India
+91 94808 26272, +91 94808 26260
bangalore@jvselectronics.in, www.jvselectronics.in

FEATURES

- ◆ Choice of different tones
- ◆ Selectable supply voltage
- ◆ Compact size

APPLICATION

The solid state hooter, type JAV 031 provides an audible annunciation when the rated supply voltage is applied. The hooter is offered with three selectable tones.



TECHNICAL DATA

RATINGS

Aux. Supply	:	24, 110, 220 V AC/DC 30, 110, 220 V AC/DC 48, 110, 220 V AC/DC
Supply Variation	:	-15% to +10%
Sound level	:	Above 90dB at 1meter *above 82db in 24v unit

SETTINGS

Tone 1	:	No loop Continuous
Tone 2	:	Short A&B Intermittent
Tone 1&2	:	Short B&C Combined


BURDEN

Supply 24 V	:	Less than 0.8W
Supply 30 V	:	Less than 0.8W
Supply 48 V	:	Less than 1.5W
Supply 110V	:	Less than 2.5W
Supply 220V	:	Less than 4.7W

MECHANICAL DESIGN

Weight : 200gms. (Approx)
Case Size Installation : Fascia 96 mm x 96mm, depth 85mm
Panel cutout : Flush mounting
Panel cutout : 92mmx92mm

TERMINAL DIAGRAM

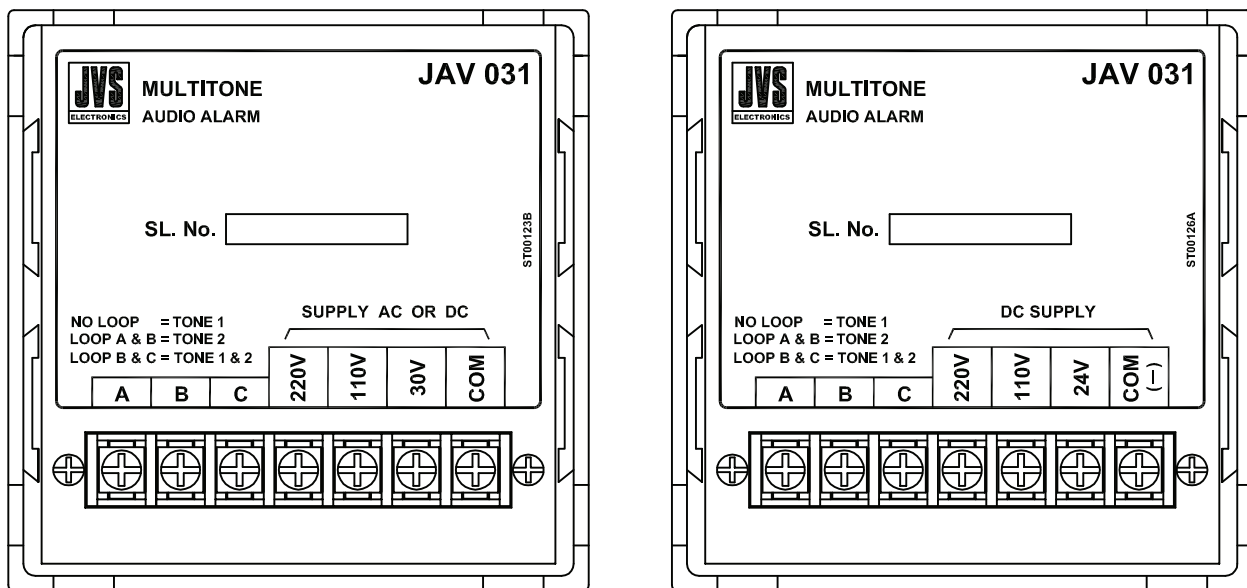

REAR VIEW OF RELAY SHOWING TERMINAL ARRANGEMENT

ORDERING INFORMATION

Type No. : JAV031-1
Supply voltage : 30, 110, 220 V AC/DC

Type No. : JAV 031 -2
Supply voltage : 24, 110, 220 V AC/DC

Type No. : JAV 031 -3
Supply voltage : 48, 110, 220 V AC/DC