



Powering Innovation



PROTECTION + AUTOMATION + CONTROL

SOUNDER JB100

JVS ELECTRONICS PVT. LTD.

#121, Manchanayakanahalli,
Bangalore Mysore Highway, Bidadi,
Ramanagara District - 562 109, Karnataka, India
+91 94808 26272, +91 94808 26260
bangalore@jvselectronics.in, www.jvselectronics.in

FEATURES

- ◆ Supply Voltage 12VDC , 20 to 65 VDC and 80 to 265VAC/ DC
- ◆ Output Range 108 to 120db Output
- ◆ 60 User selectable tone
- ◆ IP66 & IP67 compliance
- ◆ Body for high impact resistance for flame
- ◆ Stainless steel mounting bracket
- ◆ Mechanical dimension 325 mm (L)x 274 mm (φ)



APPLICATION

The hooter is specially design to use in industrial and marine environments.

TECHNICAL DATA

RELAY (ISD / IED features)	JB100 CONFIGURATION
Signal frequency	50Hz/ 60Hz
Aux. Supply	**A= 1 implies 12V DC **A= 2 implies 20-65 V DC **A= 3 implies 80V-265V AC / DC
Operating Temp	-20 to +100 degree C
Protection	IP 66 & IP 67
Output	120db
Colour	Grey
Mechanical	
Weight	3.0 kg (Approximately)
Case Size	325mm(L) x 274 mm(φ)


Ordering information

Type No. : JB100


Auxiliary supply First digit:A
1: 12 V DC
2: 20 to 65V DC
3: 80 to 265V AC / DC

TERMINAL DIAGRAM


a) For 80 to 265V AC /DC

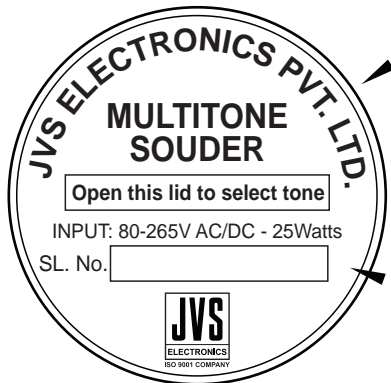

b) For 20 to 65V DC

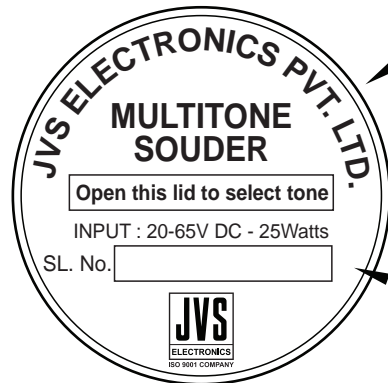

c) For 12V DC

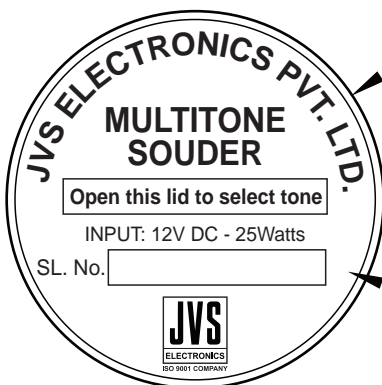

ORDERING INFORMATION

Type No. : JB100

Auxiliary supply First digit: A
1: 12V DC
2: 20 to 65V DC
3: 80 to 265V AC / DC